

SUPPLEMENTAL

•

-			}	
		1		-
Fôrm 504 Ed. June, 1928				• • • • • • • • • • • • • • • • • • • •
DEPARTMENT OF COMME				
U. S. COAST AND GEODETIC SURVEY			<u> </u>	
, Director	U.S. COAS	& GEOD	ETIC SURVEY	
	LIBRA	RY AND A	RCHIVES	
-	[1 253	-
	DE	13	1932	
<i>a</i>				
State: California	Ace. No.			
	Vre. 116'			•
	PORT			
AIR PHOTO Topographic	110			
Topographic Sheet No. 46	73	•	-	
LOCALITY				
Nan Francis es	Bay			:
			t	
Nem bergen Sl	ongh		 	· -
4 Dumbarton A	glina	ļ		
2	1	ł		
Budge				
<i>(</i>			· · · · - ·	- ·
19.31			ļ	
•	ļ		1	
	ľ			
CHIEF OF PARTY				
O 1 R	_		ļ	 :
y v v v v v v v v v v v v v v v v v v v	7	·		
U. S. GOVERNMENT PRINTING OFFICE: 1950	1	ı	<u> </u>	
<u>;</u>				
1			Ì	

Descriptive Report to Accompany Air Photo Topographic Sheet No. 4643, Steinbergen Slough to Dumbarton Highway Bridge.

This sheet is a compilation of the aerial photographs taken by the Army Air Corps' five lens camera, Type T-3-A, No. 30-1. The photographs were made in three flights: AA, A and P. Flight AA, flown on May 7, 1931, consists of twelve pictures - AAll to AA24 (photographs AA19 and AA20 being omitted) - and was taken 12:00 M at an approximate altitude of 5000 feet. Flight A, flown on April 29, 1931, consists of ten pictures - A25 to A34,- and was taken at 2:30 P.M. from an approximate altitude of 5000 feet. Flight P was flown on May 8, 1931, and consists of twelve pictures,- P37 to P48 - taken at 11:20 A.M. from an approximate altitude of 5000 feet.

The plane used was an Army 0.25, piloted by Lieutenants Wallace and Bobzein.

A factor of .9389 was used in constructing the projection.

The following tide readings were taken from the tide tables adjusted to the time of the flights:

Flight	AA	-0.2 at M.L.L.W.	<i>></i>
n	A	2.0 at "	at Ravenwood
17	A	2.6 at *	at San Mateo (beyond sheet limits).
Ħ	P	0.0 at "	

Limits:

The area of this sheet is covered by the three flights mentioned above, extending from Steinbergen Slough to Dumbarton Highway Bridge. The northern limits of the sheet southwestern shore of San Francisco Bay. The southern limit of the sheet is the Highway ElCamino Real connecting San Carlos, Redwood City and Palo Alto.

Control:

The scheme of triangulation executed in 1925 by Mussetter and in 1930-31 by Jones was used as the main control. Use was also made of all old triangulation stations that were obtainable and identified in the photographs and some material from topographic sheets 4605 and 4606.

Compilation:

The projection was constructed on celluloid to the approximate scale of Flights AA and A (Flight P was brought to the scale of the projection by photostat). A scale factor of .9389 was used and was obtained from the preliminary radial plot.

Comparisons were made with topographic sheet 4606 which was photographed to the scale of the projection. Comparison was also made with sections of T-4605. All computed triangulation stations were plotted on the projection. All triangulation stations that could be identified on the photographs were used in the radial plot.

Differences from old topography:

A direct comparison with topographic sheets 4605 and 4606 shows good agreement. There are, however, a few differences noted below:

- 1. The bend in Bayshore Highway, Latitude 37° 29', Longitude 122° 11', at the intersection of the second class road leading south, shows a difference of approximately fifteen meters. This is undoubtedly an error in inking since a careful investigation of the photograph disproves it as shown on the topographic sheet. This point in the road appears full on the center of a well controlled photograph.
- 2. The spur of the S. P. Railroad connecting the Rubber and Asbestos works with the main line curves into Chestnut Street (209° from 0°) on leaving the plant grounds and does not continue in a south westerly direction as indicated on the topographic sheet.


	3.	Slight	changes	were	discovered	in the	small a	group	of marsh	
E					1,					
a 1/-										
``										•
-										
										:
-										3
									<u> </u>	
										
.										

designation was not used.

Symbols:

The standard topographic symbols adopted by the U. S. Geographic Board were used.

Culture:

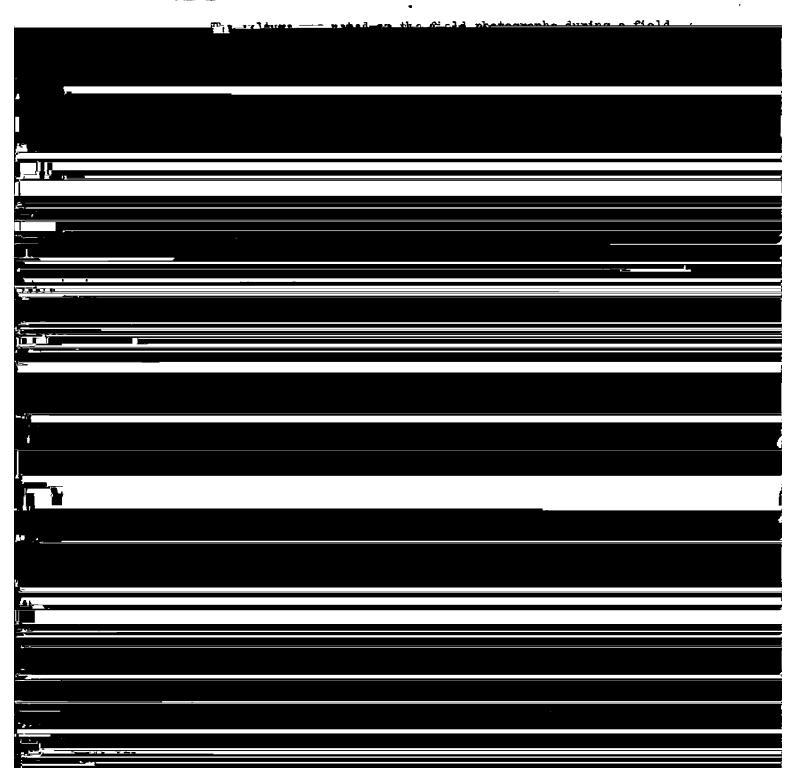

Form 537a 11—5813

DEPARTMENT OF COMMERCE U. S. COAST AND GEODETIC SURVEY

LIBRARY AND ARCHIVES	U.S.	COAS1 &	G50	DETIC SURVEY
		LIBRARY	AND	ARCHIVES

DEC 13 . 4

eA eE rR iI :A 1L TOPOGRAPHIC TITLE SHEET

The Topographic Sheet should be accompanied by this form, filled in as completely as possible, when the sheet is forwarded to the Office.

Field No.

REGISTER NO. 4643

State California
General locality San Francisco Bay
Locality Steinbergen Slough to Dumbarton Hwy., Brodge
Scale 1:10,000 Date of Surveys March, April, Fox 1932
Vessel Army Air Corps Plane
Chief of Party 0. S. Reading Compiled SXXVXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
Inked by H. E. M.
Heights in feet aboveto ground to tops of trees
Contour, Approximate contour, Form line intervalfeet
Instructions dated, 192
Remarks: This sheet is a compilation by the radial line method
Remarks: Into Shotographs, numbers P37 to P48 and AA-II to of 5 lens aerial photographs, numbers P37 to P48 and AA-II to AA-23, taken May 7,8, 1931, reduced to 1:10,000 and printed by
photolithographic process.

Description Report T 4643 Supplemental

	•	-	- ·		
	1 .	a ()		T4643 lepplement	4_0
-	The areas	polored in	red on	T4643 Lufthement	<i>∓</i> ₽
	15				
7	• •				
	1				
					ĵ
<u> </u>	F24				!
	ren 1	Ŀ			
		•			;
<u> </u>					
<u> </u>					
					Ì
- <u> </u>					
4 F F					
				/1-	
	•		_		
·					
/					4
					ś
<u>, </u>					
*					ا
ſ					
<i>a</i> , <i></i>		三元.			
/					
2					