

NOAA COASTAL MAPPING PROGRAM PROJECT COMPLETION REPORT

PROJECT FL1806G-TB-C

Big Coppitt Key to Marquesas Keys, Florida

Introduction

NOAA Coastal Mapping Program (CMP) Project FL1806G-TB-C provides a highly accurate database of new digital shoreline data for an area within the Florida Keys extending from Big Coppitt Key to Marquesas Keys. Project FL1806G-TB-C is a subproject of a larger project, FL1806-TB-C which includes coverage of the Florida Keys from Miami to Marquesas Keys.

The project database consists of information measured and extracted from aerial photographs and metadata related to photogrammetric compilation. Base mapping was conducted in a digital environment using stereo softcopy photogrammetry and associated cartographic practices, supplemented with lidar-derived Mean High Water (MHW) and Mean Lower Low Water (MLLW) data. The Geographic Cell (GC) may be used in support of the NOAA Nautical Charting Program (NCP) as well as geographic information systems (GIS) for a variety of coastal zone management applications.

Project Design

The NOAA National Geodetic Survey (NGS) formulated the Project Instructions for this project following the guidelines of the “Scope of Work, Shoreline Mapping for the Coastal Mapping Program” (SOW), Version 14A, dated October 24, 2012. The instructions discussed the project’s purpose, geographic area of coverage, scope and priority; data acquisition, processing, accuracy, and compilation requirements; product delivery and reporting instructions; and contact and communication information.

NOAA NGS supplied the lidar-derived MHW and MLLW shapefiles to be segmented, edited, and attributed by Quantum. NOAA NGS also provided shapefiles depicting the shoreline to be mapped and the boundaries of the main project area.

Quantum Spatial (QSI or Quantum) was responsible for the planning, acquisition, and post-processing of aerial imagery and lidar data in order to support photogrammetric processing and feature compilation. This includes the establishment of ground control, the post-processing of airborne GPS data, and calibration of the lidar data. In addition, Quantum provided shapefiles of the flight lines and exposure centers of the imagery to be used for compilation.

Field Operations

Quantum Spatial was contracted to perform field operations in support of their contract with the NOAA Office of Coastal Management (OCM). These field operations consisted of the surveying of ground survey points (GSPs), and the acquisition and processing of digital aerial photographs and topographic-bathymetric (topobathy) lidar data.

Ground point surveys were conducted by Quantum using a combination of GPS surveying techniques to support both the imagery and lidar data production for project FL1806-TB-C. The survey to support imagery production included a total of 277 GSPs, both control and check points, at 93 target locations. A separate ground point survey to support lidar data production included 2655 vertical GSPs, with 2088 points being utilized to control the lidar processing, and 567 points withheld as vertical accuracy checks. Survey field work was performed from November 2018 to January 2019. Ground Survey Reports are on file with other project data within the NGS Remote Sensing Division (RSD) Electronic Data Library.

The lidar acquisition phase of the project was conducted by Quantum from November 2018 through March 2019. A total of 97 missions were completed and tidally coordinated within 20% of the Mean Range of tide around MLLW for the entire FL1806-TB-C project. Lidar data was captured at a target point density of at least two points per square meter using a 550 kHz Riegl VQ-880-G hydrographic airborne laser scanner.

The digital imagery acquisition phase of the project was conducted by Geomni from January to May 2019. A total of 38 flight lines of 4-band imagery were acquired and tidally coordinated within 25% of the Mean Range of tide around MLLW for the entire FL1806-TB-C project, with 16 lines falling partially or entirely within the FL1806G-TB-C project area. Imagery was captured with a nominal ground sample distance (GSD) of 0.33 meters through the use of a large format DMCII 230-526 camera with a focal length of 92.00 mm.

GPS Data Processing

Each acquisition aircraft used by Geomni was equipped with either a POSAV Applanix Model 510 IMU and/or a dual frequency Trimble BD960 to collect the ABGPS and IMU data. NGS CORS, and several Cooperative CORS stations, were used for base stations on the project, with at least two of these CORS stations being used to process each POSAV dataset to achieve the final photo center locations. GPS/IMU processing was accomplished using Waypoint Inertial Explorer (8.60) software. Airborne Positioning and Orientation Reports (APOR) are on file with other project data within the RSD Electronic Data Library.

Lidar Data Processing

The lidar processing phase of the project was performed by Quantum using Riegl's RiProcess software to facilitate bathymetric return processing. Once bathymetric points were differentiated, they were spatially corrected for refraction through the water column based on the angle of incidence of the laser. Quantum refracted water column points using Riegl's RiHydro tools. The resulting point cloud data were classified using both manual and automated techniques. The final processed lidar products delivered to RSD included a fully classified point cloud, 1-meter resolution tiled topobathy bare earth models, tiled clipped topobathy bare earth models, tiled topobathy standard deviation models in ERDAS imagine file format, 1-meter resolution tiled DZ orthos in GeoTiff format, a bathymetric void polygon shapefile, an area of interest shapefile, a lidar tile index shapefile, a DEM tile index shapefile, and FGDC compliant metadata files.

RSD received classified lidar tiles covering the project area and used NOAA VDatum software to convert the vertical datum of the lidar points from NAD83 ellipsoid to local MHW and MLLW tidal datums. QT Modeler and custom ArcGIS scripts were used to produce bare earth

MHW and MLLW digital elevation models at a 1-meter grid resolution and to create and format the MHW and MLLW vectors into shapefile format.

The lidar point cloud was compared to higher accuracy ground control points to determine vertical uncertainties of the data set and then compared to the morphologic slope around the derived shoreline at numerous sample sites in the project area to determine the uncertainty of the vectors. Based on this assessment the MHW lidar-derived shoreline vectors meet a horizontal accuracy of 2.6 meters at the 95% confidence level, and the MLLW lidar-derived shoreline vectors meet a horizontal accuracy of 3.2 meters at the 95% confidence level. For further information on the lidar processing refer to the Final Report of Survey on file with other project data within the RSD Electronic Data Library.

Aerotriangulation

The aerotriangulation (AT) phase of the project was performed by Quantum using digital AT methods to establish the network of photogrammetric control required for the compilation phase. Hexagon's ImageStation automated aerotriangulation (ISAT) software was used to perform automatic point measurements and interactive point measurements of tie points. In addition to the surveyed control points, 26 additional points were extracted from NOAA 2014 lidar data covering the western part of the project, and included in the AT as vertical control. The final adjustment of the block was accomplished by using a rigorous simultaneous least squares bundle adjustment, and analysis tools within ISAT were used to refine the aerotriangulation solution and to evaluate the accuracy of the adjustment. Of the 1340 images in the project, 935 were included in the bundle adjustment. The remaining 405 images covered only water, and were not able to be aerotriangulated. These water models were positioned using direct georeferencing.

The Root Mean Square (RMS) of the standard deviations in both X and Y directions were calculated and used to determine a predicted horizontal circular error at the 95% confidence level of 0.18 meters for the 4-band photos. An AT Report is on file with other project data within the RSD Electronic Data Library.

The project database consists of project parameters and options, camera calibration data, interior orientation parameters, ground control parameters, adjusted exterior orientation parameters, and positional listing of all measured points. Positional data is horizontally referenced to the North American Datum of 1983 (NAD 83).

Compilation

The data compilation phase of the project was initiated by Quantum personnel in November 2019. This work was accomplished using a stereo-enabled PC-based graphics workstation running DAT/EM Summit Evolution (ver. 7.6) digital photogrammetric software. Feature identification, segmentation, and attribution were based on imagery analysis of the processed digital images and information extracted from the appropriate NOAA Nautical Charts, U.S. Coast Guard Light List and other ancillary sources. Feature attribution was assigned in compliance with the Coastal Cartographic Object Attribute Source Table (C-COAST), which provides the definition and attribution scheme for the full range of cartographic features pertinent to the CMP. Selected features were further modified with additional descriptive information to refine general classification.

Spatial data accuracies for project FL1806G-TB-C were determined according to standard Federal Geographic Data Committee (FGDC) practices. Cartographic features extracted from stereo imagery were compiled to meet a horizontal accuracy of 0.4 meters, at the 95% confidence level. This predicted accuracy of compiled, well-defined points is derived by doubling the circular error calculated from the aerotriangulation statistics. Accuracies of lidar-derived features are described above.

The table below provides information on the imagery used to complete this project:

Date	Time (UTC)	Flight Line	Photo ID	Tide Level *
02/17/2019	17:08 – 17:15	20-020	0024 – 0001	0.2 m
02/17/2019	17:18 – 17:24	20-021	0002 – 0023	0.2 m
02/17/2019	17:44 – 17:50	20-022	0023 – 0001	0.2 m
02/17/2019	17:53 – 17:59	20-023	0002 – 0022	0.2 m
02/17/2019	18:19 – 18:25	20-024	0022 – 0001	0.2 m
02/17/2019	18:28 – 18:34	20-025	0002 – 0021	0.2 m
02/17/2019	18:55 – 18:59	20-026	0014 – 0001	0.3 m
02/17/2019	19:02 – 19:07	20-027	0002 – 0020	0.3 m
02/18/2019	17:51 – 17:56	20-031	0019 – 0001	0.2 m
02/18/2019	17:59 – 18:04	20-032	0002 – 0019	0.2 m
02/18/2019	18:07 – 18:12	20-033	0018 – 0001	0.2 m
02/18/2019	18:15 – 18:17	20-034	0001 – 0009	0.2 m
02/18/2019	18:35 – 18:36	20-034	0110 – 0117	0.1 m
05/20/2019	19:35 – 19:37	20-026	0115 – 0120	0.1 m
05/20/2019	19:53 – 19:55	20-038	0006 – 0001	0.1 m
05/20/2019	20:02 – 20:07	20-037	0017 – 0001	0.1 m
05/20/2019	20:13 – 20:19	20-036	0002 – 0019	0.1 m
05/20/2019	20:22 – 20:27	20-035	0018 – 0001	0.0 m

* Tide levels are given in meters above MLLW and are based on verified observations recorded by NOAA gauge 8724580 at Key West, FL. The height of the MHW datum at the Key West gauge is 0.463 meters above MLLW.

Quality Control / Final Review

Quality control tasks were conducted during all phases of project completion by a senior member of Quantum. The final QC review was completed in October 2020. The review process included analysis of AT results and assessment of the identification and attribution of digital feature data within the GC according to image analysis and criteria defined in C-COAST. The quality control process concluded with an inspection of topological connectivity within the GC using Esri's ArcGIS (ver. 10.8.1) software. All project data was evaluated for compliance to CMP requirements.

Comparisons of the largest scale NOAA nautical charts with project imagery and compiled project data resulted in creation of the Chart Evaluation File (CEF). The following nautical charts

were used in the comparison process:

- 11439, Sand Key to Rebecca Shoal, 29th Ed., Jun. 2019
- 11441, Key West Harbor and Approaches, 42nd Ed., Feb. 2013
- 11442, Florida Keys Sombrero Key to Sand Key, 37th Edition, Aug.2018
- 11446, Intracoastal Waterway, Sugarloaf Key to Key West, 33rd Ed., Jan. 2013
- 11447, Key West Harbor, 38th Ed., Jul. 2013

End Products and Deliverables

The following specifies the location and identification of the products generated during the completion of this project:

Remote Sensing Division Electronic Data Library


- Ground Control Report
- Airborne Positioning and Orientation Reports (APOR)
- Aerotriangulation Report
- Topobathy Final Report of Survey
- Project database
- GC11517 in shapefile format
- Project Completion Report (PCR)
- CEF in shapefile format

NOAA Shoreline Data Explorer


- GC11517 in shapefile format
- Metadata file for GC11517
- PCR in Adobe PDF format

End of Report

BIG COPPITT KEY TO MARQUESAS KEYS FLORIDA

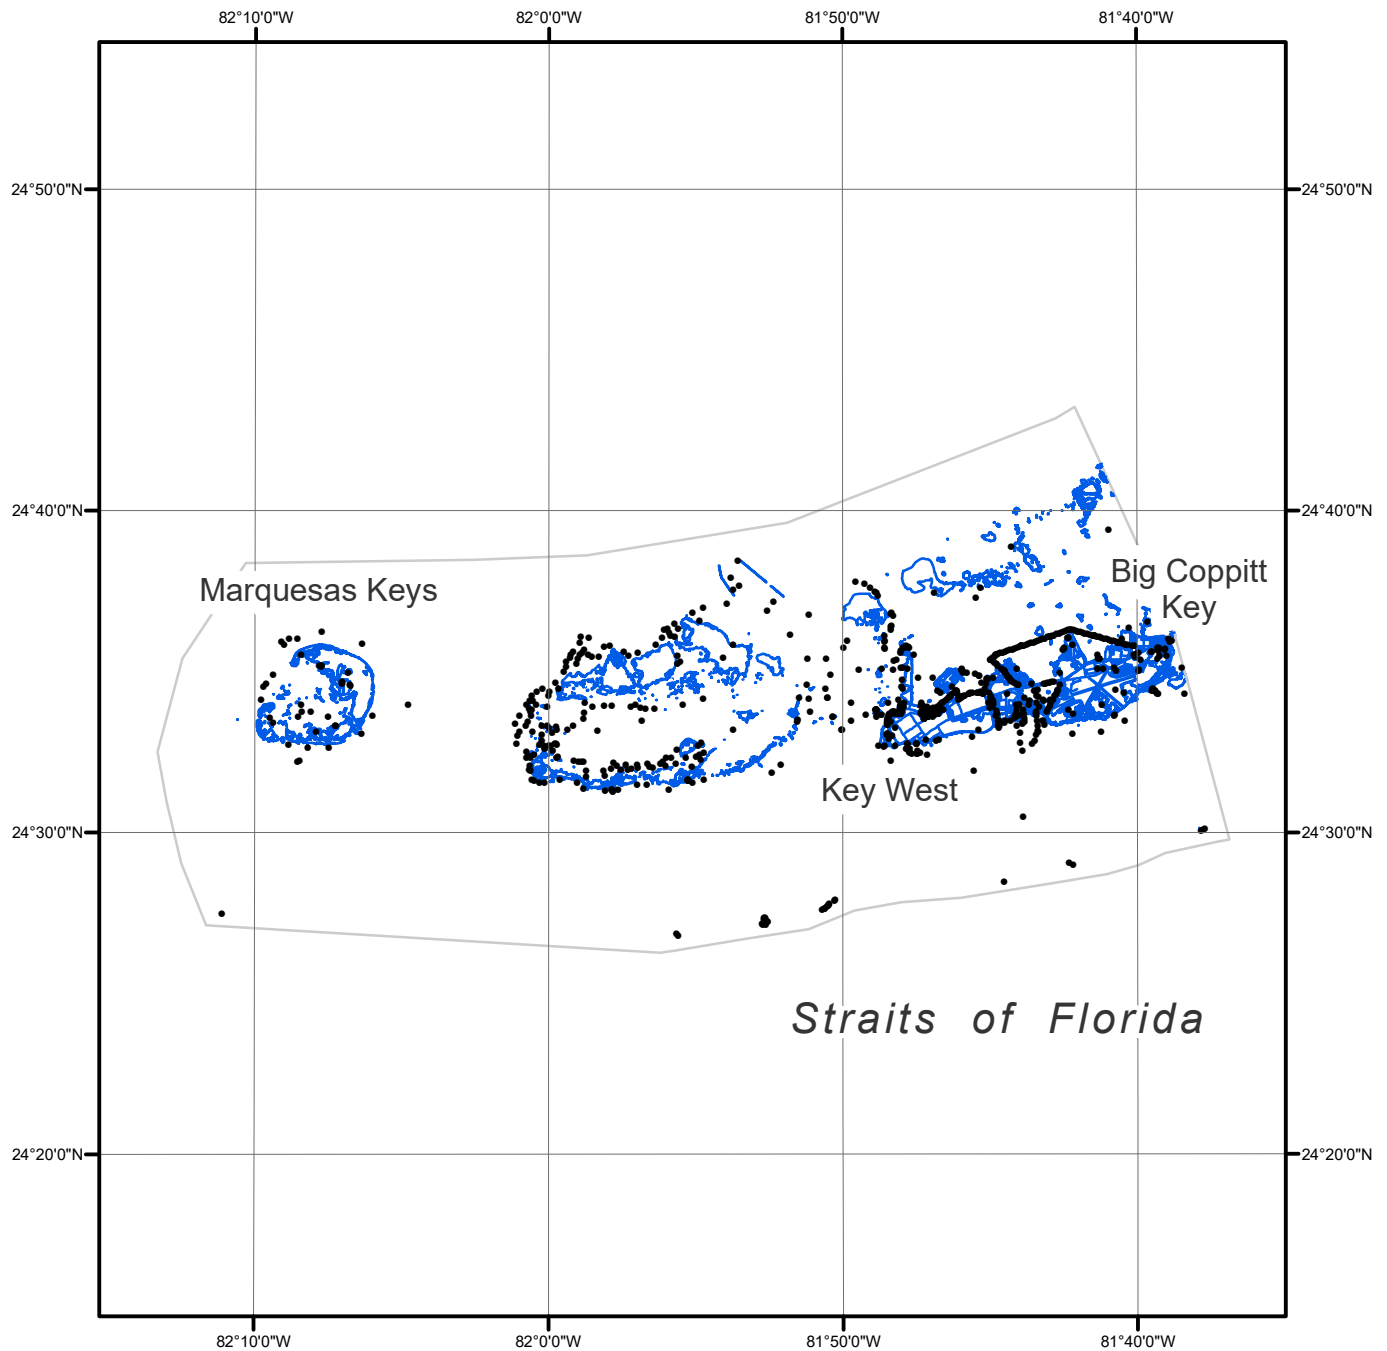

Overview

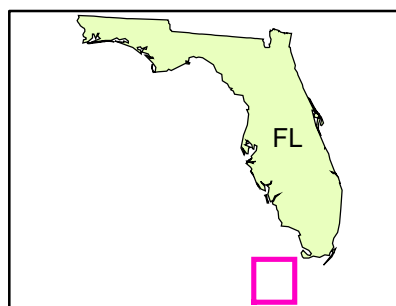

FL1806G-TB-C

GC11517