

# **NOAA COASTAL MAPPING PROGRAM PROJECT COMPLETION REPORT**

## ***PROJECT MI0706***

### ***Pentwater Harbor, Michigan***

#### **Introduction**

NOAA Coastal Mapping Program (CMP) Project MI0706 provides a highly accurate database of new digital shoreline of Pentwater Harbor, Michigan.

Successful completion of this project resulted in a densification of the National Spatial Reference System (NSRS), a set of controlled metric-quality aerial photographs, and digital feature data of the coastal zone which compliments the Nautical Charting Program (NCP) as well as geographic information systems (GIS) for a variety of coastal zone management applications.

The project database consists of information measured and extracted from aerial photographs and metadata related to photogrammetric compilation. Base mapping was conducted in a digital environment using stereo softcopy photogrammetry and associated cartographic practices.

#### **Project Design**

The Requirements Branch (RB) of the Remote Sensing Division (RSD) formulated the photographic mission instructions for this project following the guidelines of the Photo Mission Standard Operating Procedure Version II (7/1/93). The instructions discussed the project's purpose, geographic area of coverage, scope and priority; photographic requirements; flight line priority; Global Positioning System (GPS) data collection procedures and guidelines for both kinematic and static surveys; data recording and handling instructions; and contact and communication information. RB created a Project Layout Diagram, flight maps and input files for the aircraft's flight management system.

#### **Field Operations**

Initial field operations consisted of the collection of static and kinematic GPS data and the acquisition of aerial photographs. The photographic mission operations were conducted on May 28<sup>th</sup>, 2007, with the NOAA Cessna Citation II (N52RF) aircraft. Two strips of natural color photographs were acquired through use of a Wild RC-30 camera with the NOS "A" lens cone at the nominal scale of 1:30,000.

Airborne GPS data collection operations were conducted in accordance with the GPS Controlled Photogrammetry Field Operations Manual (10/25/99). A GPS base station was established atop a PKNAIL at the MBS International Airport (MBS), and airborne kinematic GPS data was collected to determine precise camera positions in order to establish a control network necessary for aerotriangulation. Refer to the Airborne

Positioning and Orientation Report (APOR Report 07MBS148) for further details.

Following initial image Georeferencing and Aerotriangulation (AT) activities, significant discrepancies in the positions of charted features were noted. In order to have better confidence in the AT solution, the RSD cartographer requested the acquisition of three photo-identifiable ground control points (GCPs) to be surveyed by the OCS Navigation Response Team (NRT) conducting operations in the project vicinity. Refer to the Pentwater Harbor GCP Collection Descriptive Report dated April 10, 2008 by NRT-4 for further details.

### **GPS Data Reduction**

GPS and IMU data was collected and processed by RSD personnel to provide precise positions of camera centers for application as photogrammetric control in the aerotriangulation phase of project completion. The static GPS base station data was processed in December 2007 using the NGS Online Processing User Service (OPUS) to compute fixed baseline solutions from three CORS stations. The airborne kinematic data was processed using Applanix POSGPS (ver. 4.4) software in December 2007. Refer to the Airborne Positioning and Orientation Report (APOR) for further information on GPS data processing.

### **Aerotriangulation**

Routine softcopy aerotriangulation methods were applied to establish a network of precise camera positions and other control for mapping, and to provide model parameters and orientation elements required for digital compilation. This work was initiated by RSD personnel in February 2008 utilizing a Digital Photogrammetric Workstation (DPW), which is a configuration of computer hardware, modular software components and other associated peripheral devices. The color photographs were measured and adjusted as a single block using BAE Systems SOCET SET (version 5.3) photogrammetric software in conjunction with the Multi-Sensor Triangulation (MST) module of aerotriangulation software. Upon successful completion of the aerotriangulation process, the MST software provided the RMS of the standard deviations of the residuals for each aerotriangulated ground point, which were used to compute a predicted horizontal circular error of 1.1 meters based on a 95% confidence level. An Aerotriangulation Report was written and is on file with other project data within the RSD Project Archive.

The project database consists of project parameters and options, camera calibration data, interior orientation parameters, ground control parameters, adjusted exterior orientation parameters, and positional listing of all measured points. Positional data is referenced to the North American Datum of 1983 (NAD 83).

### **Compilation**

The data compilation phase of this project was initiated by RSD in April 2008. Digital mapping was performed using a DPW in conjunction with the SOCET SET Feature Extraction software module. Feature identification and attribution within the Geographic Cell (GC) were based on image analysis of 1:30,000 scale photographs and information

extracted from the appropriate NOAA nautical charts, US Coast Guard Light List and other ancillary sources. Feature attribution was assigned in compliance with the Coastal Cartographic Object Attribute Source Table (C-COAST), which provides the definition and attribution scheme for the full range of cartographic features pertinent to the CMP. Selected features were further modified with additional descriptive information to refine general classification.

Spatial data accuracies for MI0706 were determined according to standard Federal Geographic Data Committee (FGDC) practices. Cartographic features were compiled to meet a horizontal accuracy of 2.2 meters at the 95% confidence level. This predicted accuracy of compiled, well defined points is calculated by doubling the circular error derived from aerotriangulation statistics.

The following table provides information on aerial photographs used in the project completion:

Date	Time (UTC)	Roll Number	Photo Numbers	Scale (nominal)	Lake Level*
05-28-07	14:41-14:43	07ACN09	1363-1366	1:30,000	176.1
05-28-07	15:48-15:50	07ACN09	1367-1370	1:30,000	176.1

\*Lake levels are given in meters above IGLD 1985 and are based on actual observations recorded by the NOS gauge at Ludington, Michigan at the time of photography.

### Quality Control / Final Review

Quality control tasks were conducted during all phases of project completion by a senior member of the RSD Applications Branch. The final QC review was completed in May 2008. The review process included analysis of the georeferencing results and assessment of the identification and attribution of digital feature data within the GC according to image analysis and criteria defined in C-COAST. The quality control process concluded with an inspection of topological connectivity within the GC using ArcGIS 9.1. The entire suite of project products was evaluated for compliance to CMP requirements.

Comparisons of the largest scale NOAA nautical charts with natural color photographs and compiled project data resulted in creation of the Chart Evaluation File (CEF). The following nautical chart was used in the comparison process:

14907, Stony Lake to Point Betsie, 1:120,000, 26<sup>th</sup> edition, January 2006  
and the Pentwater Harbor, MI inset, 1:10,000

### End Products and Deliverables

The following specifies the location and identification of end products generated during the completion of this project:

#### RSD Applications Branch Archive

- Hardcopy of the Airborne Positioning and Orientation Report (APOR)
- Hardcopy of the Aerotriangulation Report

- Hardcopy of the Project Completion Report (PCR)
- Page size graphic plot of GC10704 file contents, attached to PCR

#### **Remote Sensing Division Electronic Data Library**

- Project database
- GC10704 in shapefile format
- Digital copy of the PCR in Adobe PDF format
- CEF in shapefile format


#### **NOAA Shoreline Data Explorer**

- GC10704 in shapefile format
- Metadata file for GC10704
- Digital copy of the PCR in Adobe PDF format


**End of Report**

# PENTWATER HARBOR

## MICHIGAN

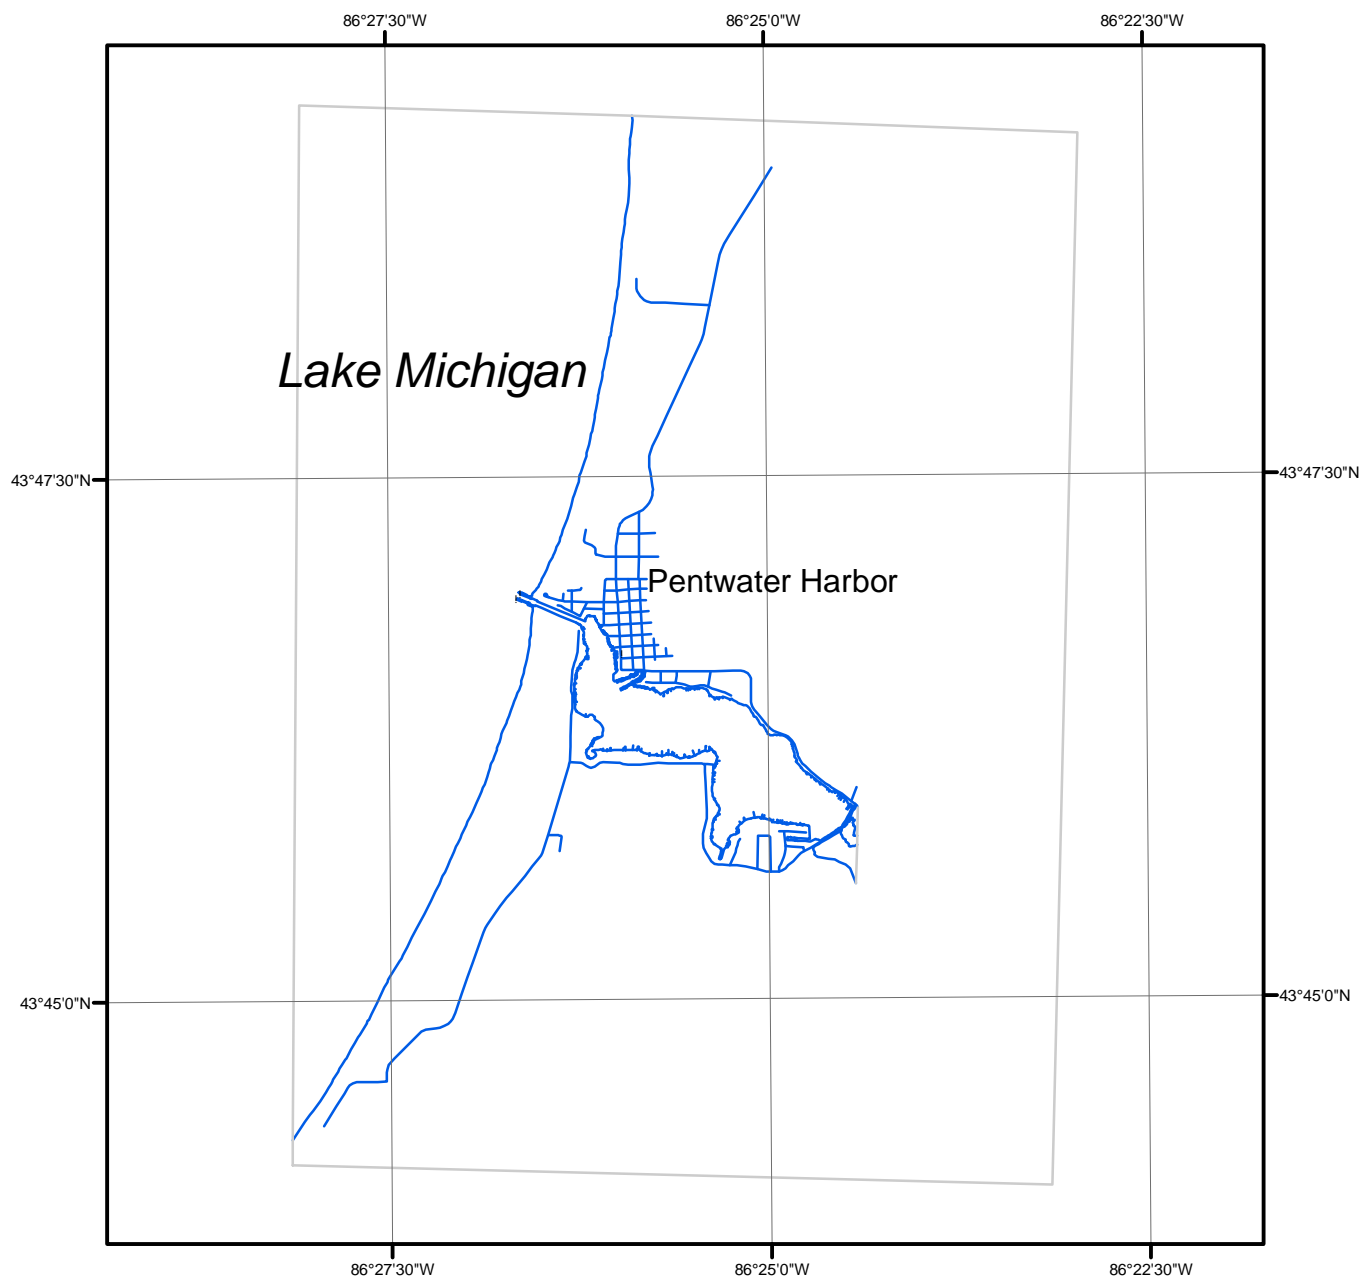

Overview

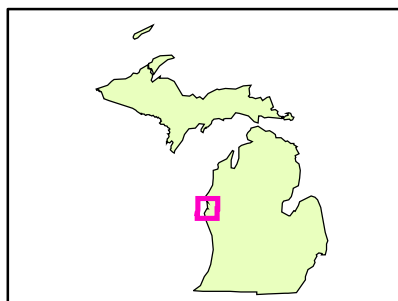

MI0706

GC10704